


SANWA ADAPTOR FOR PHOENIX RC SIMULATOR. (FOR RDS8000, RD8000, RD SERIES)

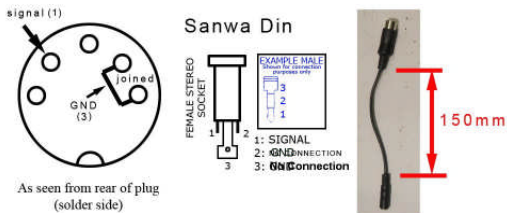

NUMBERS IN DIAGRAM SHOULD BE:

SIGNAL=1. (ON DIN PIN 2)

GROUND=2.(ON DIN PIN 5) NO NEED JOINT PIN 4.


NO CONNECTION =3.

PART LIST:

HALF MOON 5 PIN DIN CONNECTOR x 1.

AUDIO WIRE 160mm x 1.

3.5mm STEREO FEMALE SOCKET x 1

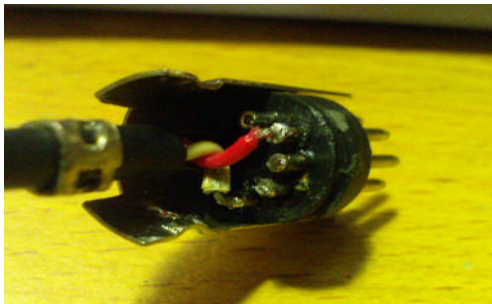

SOLDER THE WIRE TO CONNECTOR. CLAMP IT. SLIDE IN THE RUBBER COVER.



! USE MULTIMETER TO CHECK FOR THE CORRECT TAB FOR SIGNAL AND GROUND. (DIFFERENT BRAND MAY HAVE DIFFERENT LA YOUT)

SLIDE IN THE SOCKET PLASTIC COVER TO THE WIRE 1ST.
SOLDER THE WIRE TO 3.5mm STEREO FEMALE SOCKET.
SCREW THE COVER ON.



ONCE YOU DONE, YOUR ADAPTOR SHOULD LOOK LIKE THIS.